

FIG. 1

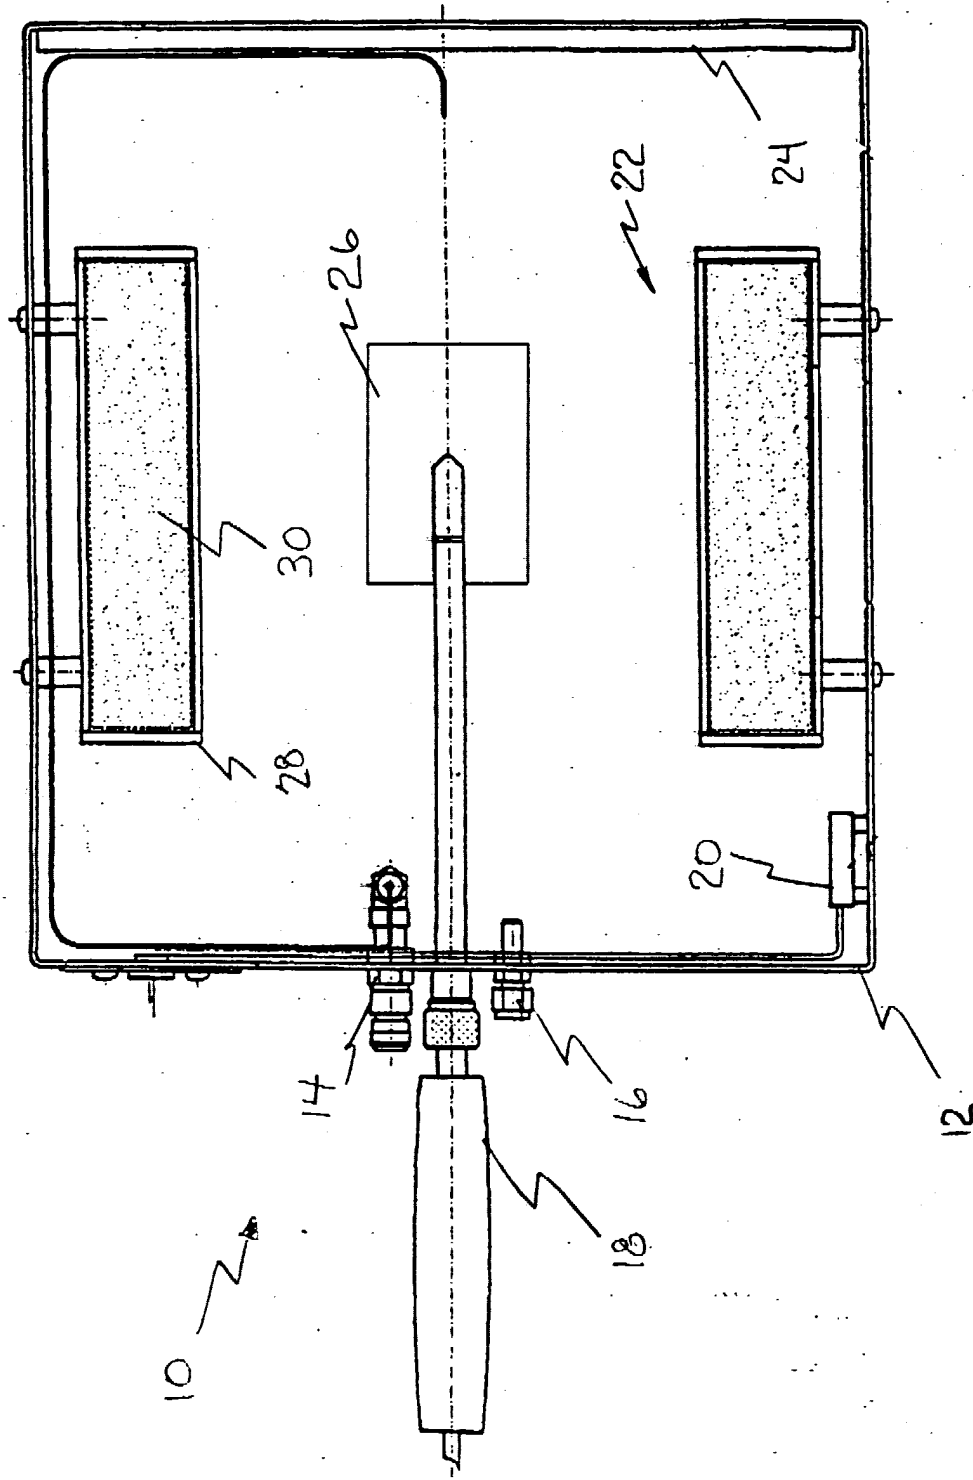


Figure 1

Fig. 2. PEM Mass Increases Due to Humidified Air
at 95±5% RH/ca. 23 C (Air Pre-Heat: 125 C/60 Hr)

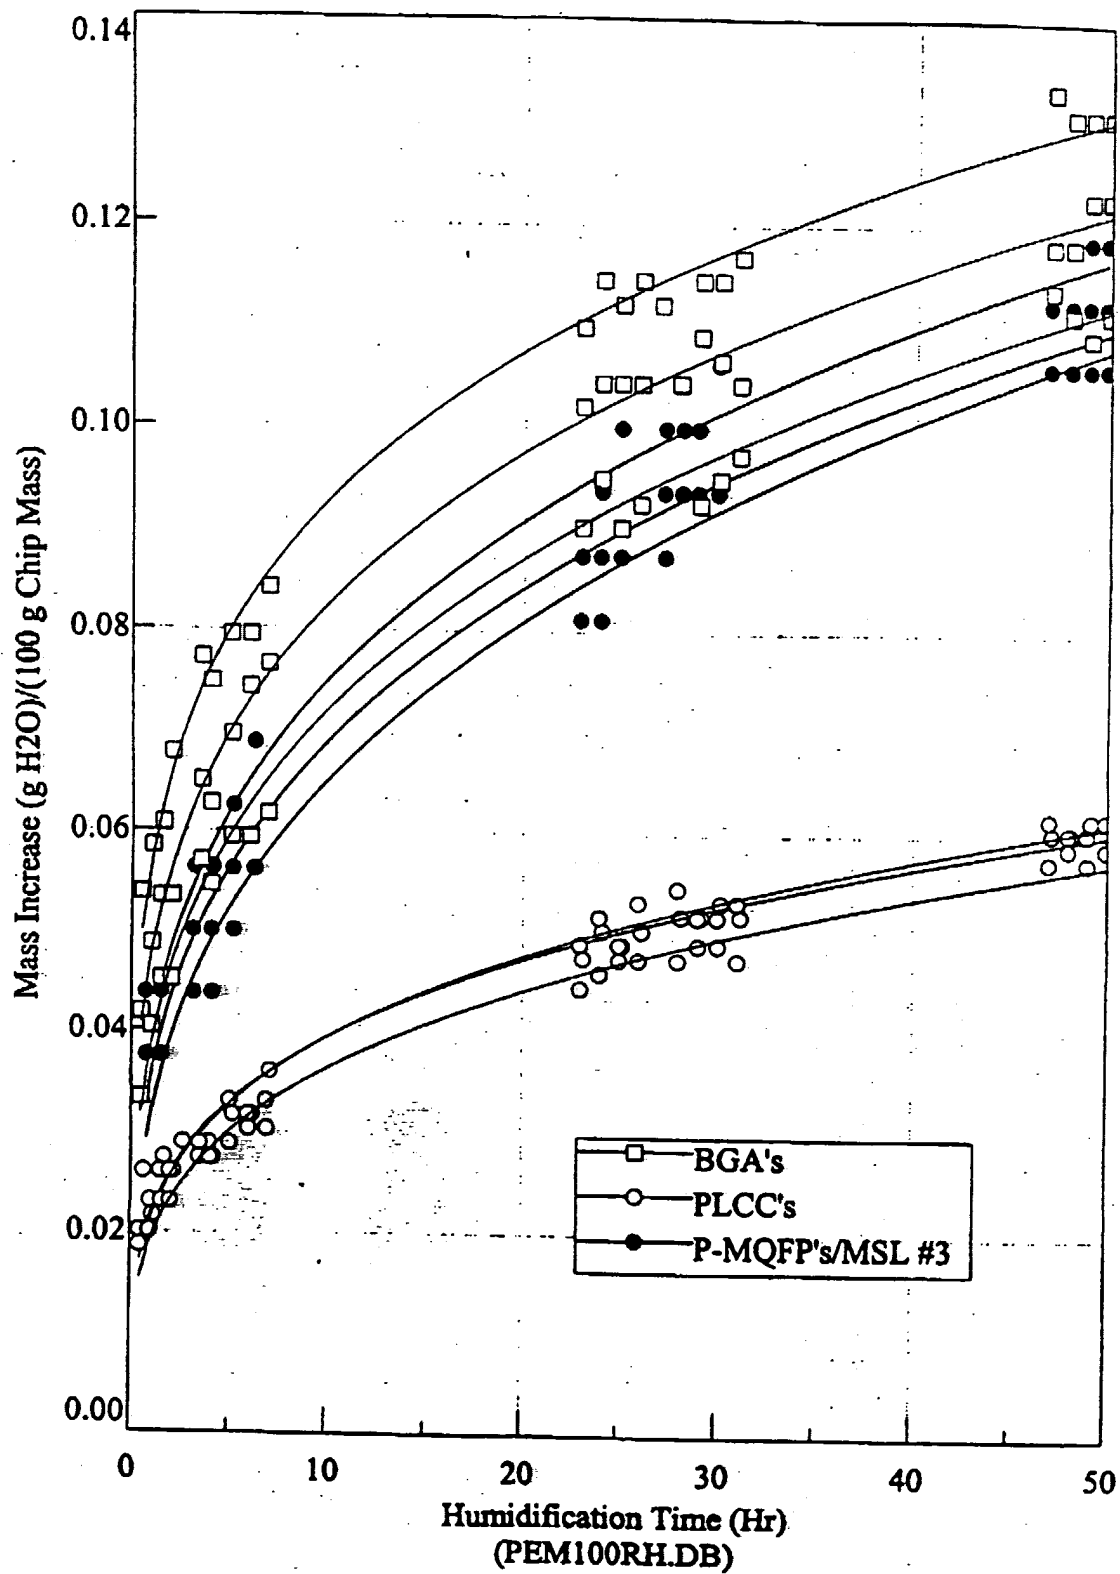


Fig. 3. Theoretical PEM Mass Increases Due to Humidified Air (PEM MSL 3 With Air Pre-Heat at 125 C/60 Hr)

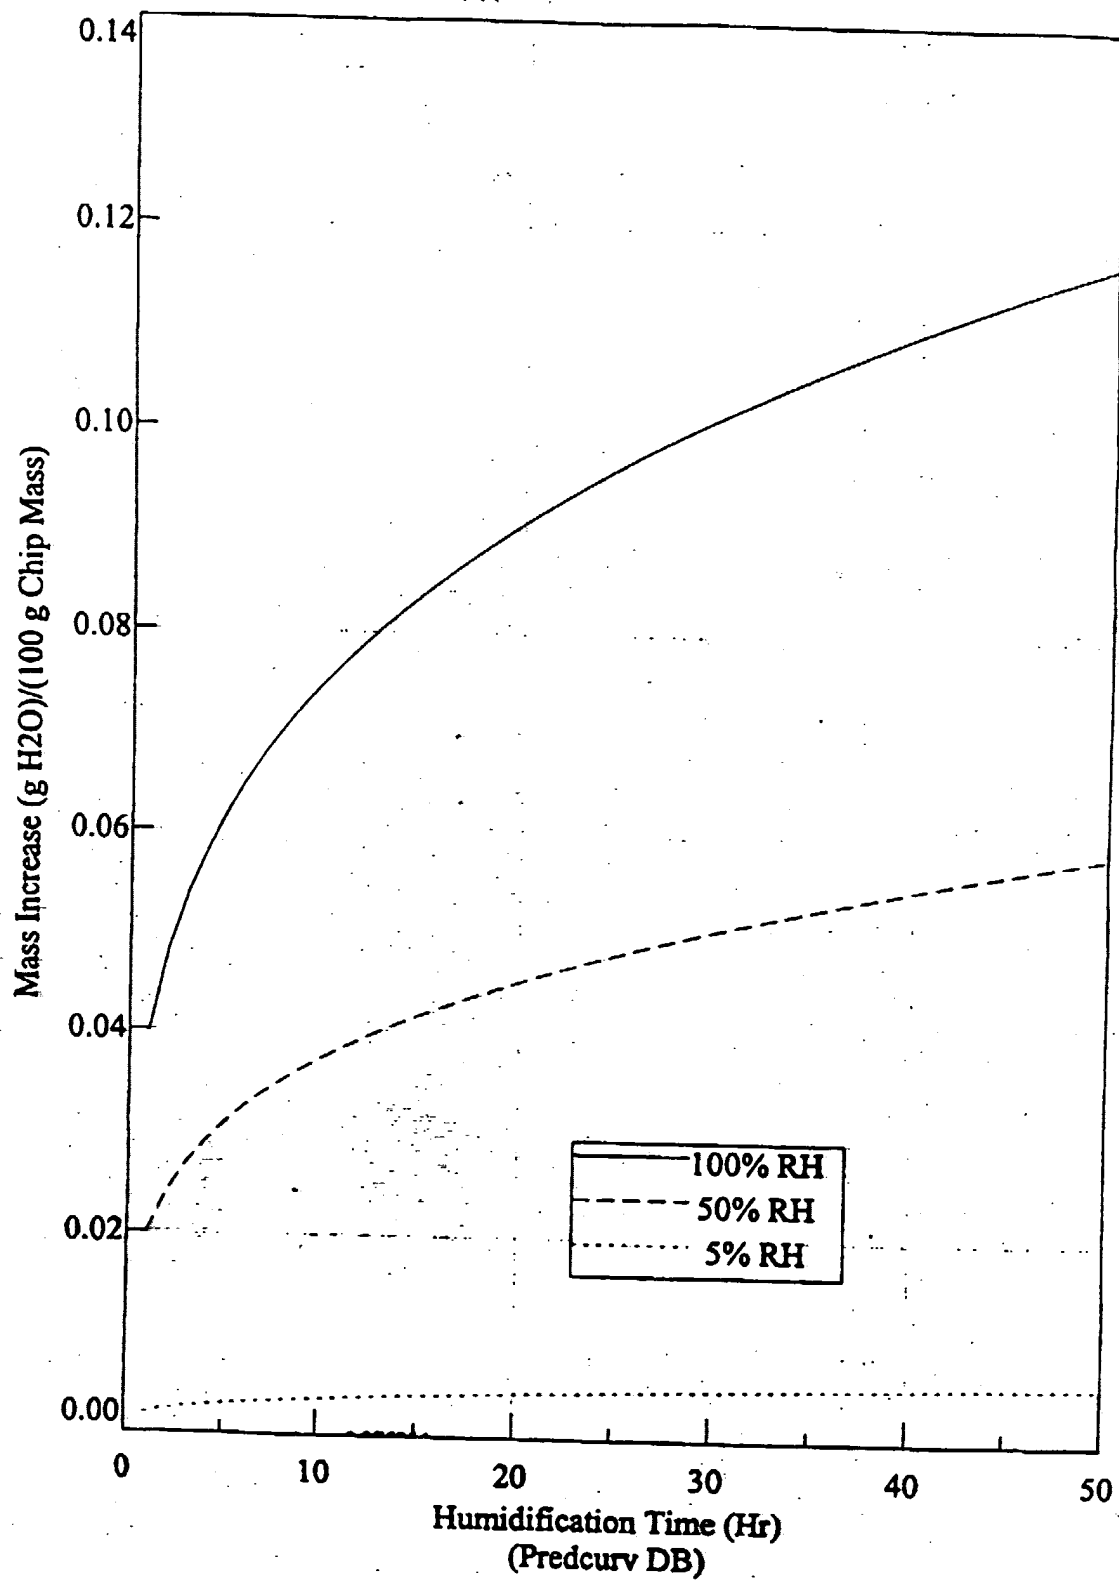


Fig. 4. Mass Increases in MSL 3 MQFP's Due to Humidified Air at $50\pm 5\%$ and $95\pm 5\%$ RH and at 23 ± 2 C
(Air Pre-Heat: 125 C/60 Hr)

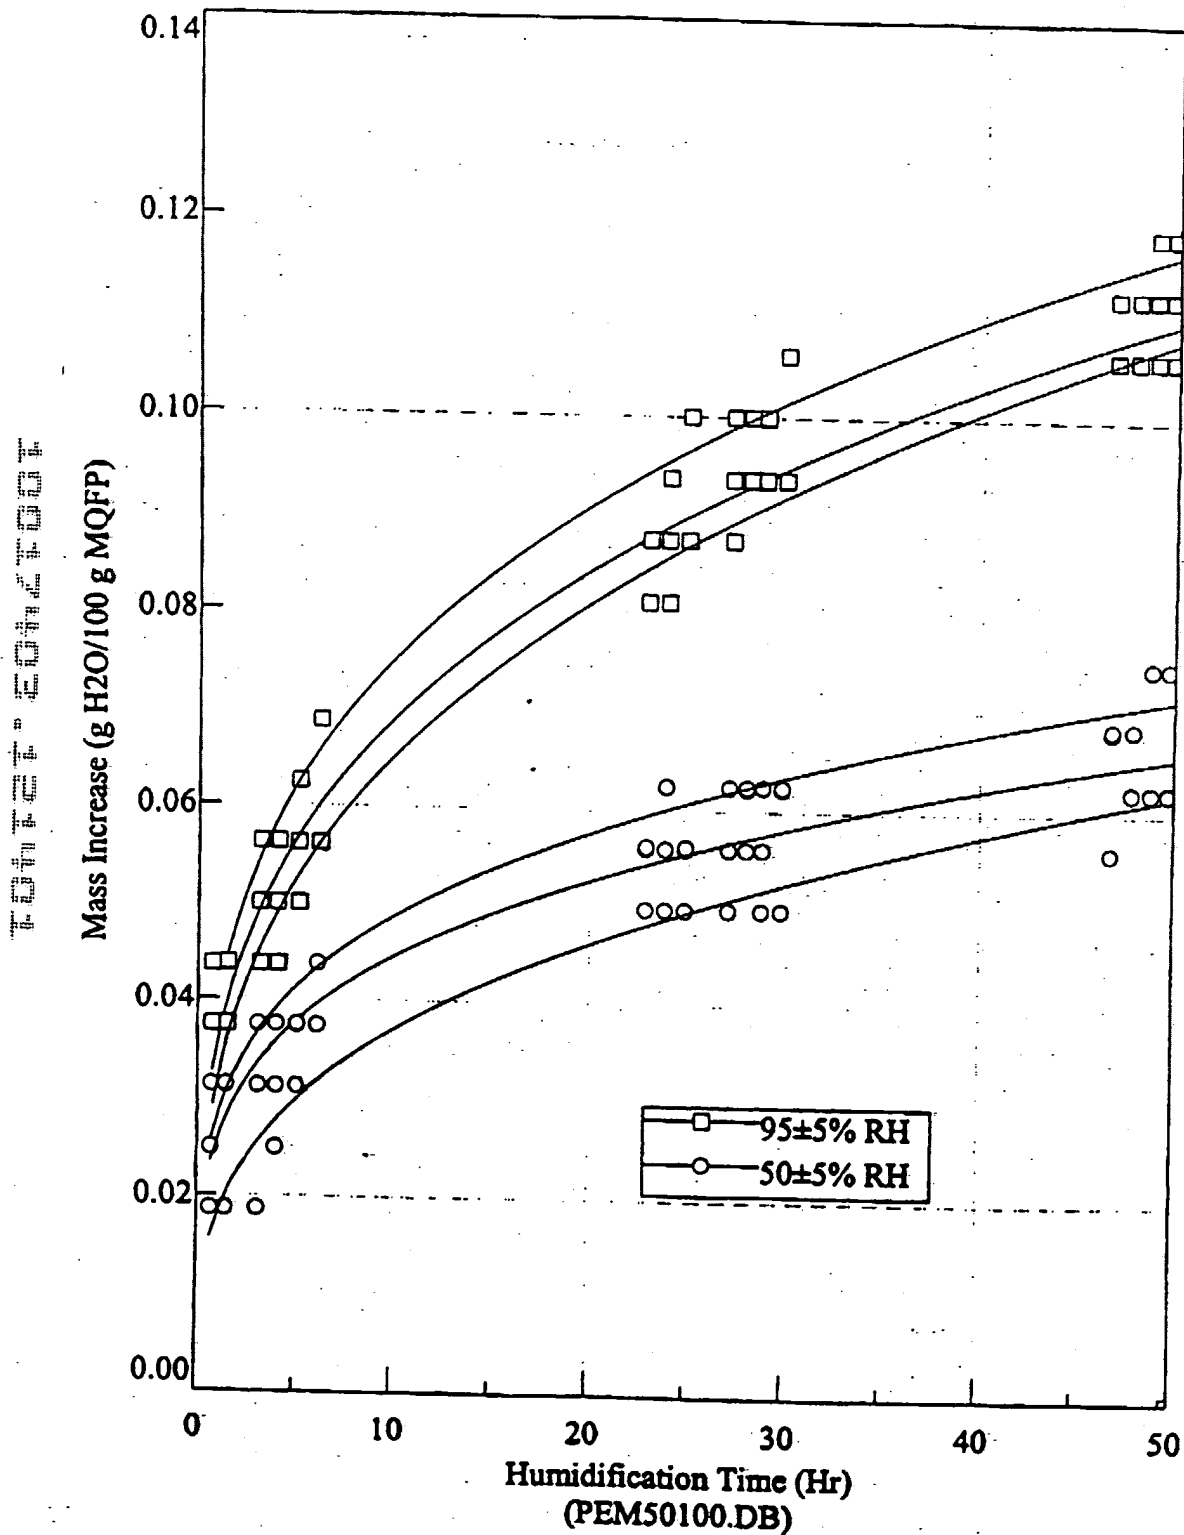


Fig. 5. BGA/PLCC PEM Mass Decrease Due to Drying at 125 C
in Air (PEM's Previously Saturated at ca. 100 % RH/23 C)

